No ROHS hazardous material

Ordinal	Modify content description	Cartographer	Date of change
1			
2			

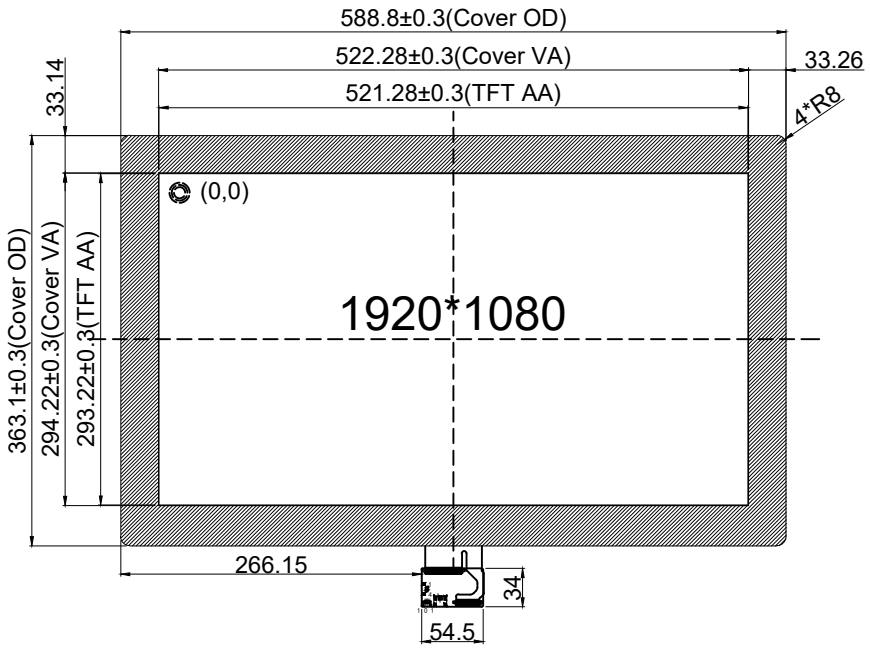

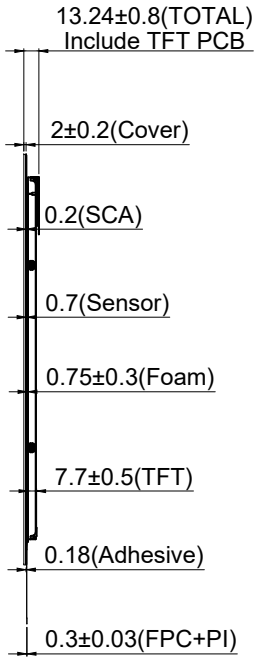

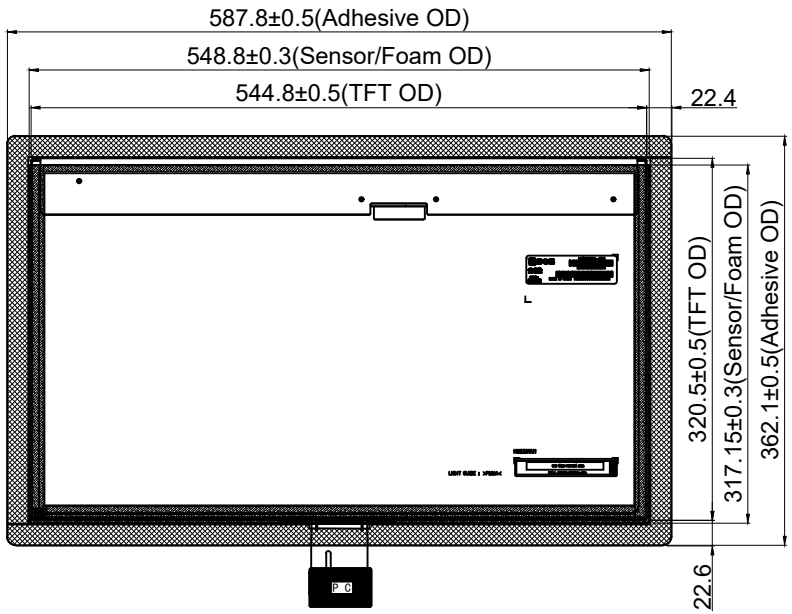

Screen printing area: Print Black

Frame adhesive area =0.175mm

Frame adhesive foam area = 0.75mm

TFT:HM236WU1-300

Front view

Side view

Back view

Technical parameters			
1. Interfaces:	USB(TP)	7. Humidity range:	45～85%RH
2. Structure :	G+G+TFT (Air boading)	8. Transmittance:	≥85%
3. IC Solutions:	ILI2510	9. Surface hardness:	≥6H
4. Impact Resistance:	30.0ΦDIA.Steel Ball /132g/Height=35cm/1time	10. Operate :	-20℃～+70℃, ≤85%RH
5. Touch points:	10 points	11. Storage :	-30℃～+80℃, ≤85%RH
6. Power supply:	5V	12. Unmarked dimension tolerance as±0.5	

USB(4PIN)

PIN	Definition
1	VCC
2	D-
3	D+
4	GND



PCB Board SCALE 3:1

杭州宏枭科技有限公司
GraHowlet Technology CO.,Ltd

Model	HX2361808			View Direction		Unit	MM
Version	V1.0	Designer	LUO	Date	2018-7-19	Edition	A1
Customer		Approved				Proportion	1:1